

NBS

Off line UPS



Main Features:


- Advanced digital control technique
- Streamline, colorful appearance design
- Comprehensive net equipment protection
- Green idea environmental design
- Flexible and practical cold start function
- Wide voltage range for intellectual regulating (SMART AVR)
- Intelligent power management (optional)

Application:

- PC
- SOHO
- office
- small device

Rear Panel:

- 1) RJ11/RJ45 for Tel/Fax/Modem/Network
- 2) Output Socket
- 3) Surge Protection (p.s. without battery back-up)
- 4) RS232 Communication Port
- 5) Inlet with Fuse

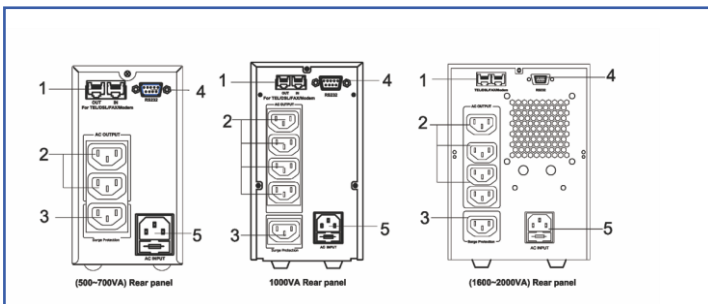

Specification

MODEL		UPS700L	UPS1200L	UPS2000L
INPUT	Voltage(Vac)	140~280 / 90~145		
	Frequency (Hz)	50/60 ± 10%		
OUTPUT	Power(VA/W)	700/420	1200/720	2000/1200
	Voltage(Vac)	220±10% / 120±10% (on battery mode)		
	Frequency(Hz)	Synchronizing with input AC while it is normal, and 50±0.5% on battery mode		
	Transfer Time	Typical 6ms, including detection time and switching time (Synchronous switch-over)		
BATTERY	Voltage (Vdc)	12	24	48
	BATT Type	External		
	Charger Current(A)Max	8	5	5
OTHER	Communication Interface	RS232, RJ11 / RJ45 (Dry contacts, USB and SNMP adapter are optional)		
	Display	LCD display show status of AC input, inverter, low battery, overload and battery capacitor LED indicators show status of AC input, inverter, low battery, overload		
	Dimension (W×D×H) mm	120×395×220	120×395×220	156×450×220
	Weight(kg)	11	12	17